


* D DENOTES DOWEL DIAMETER DOWEL MAY BE USED

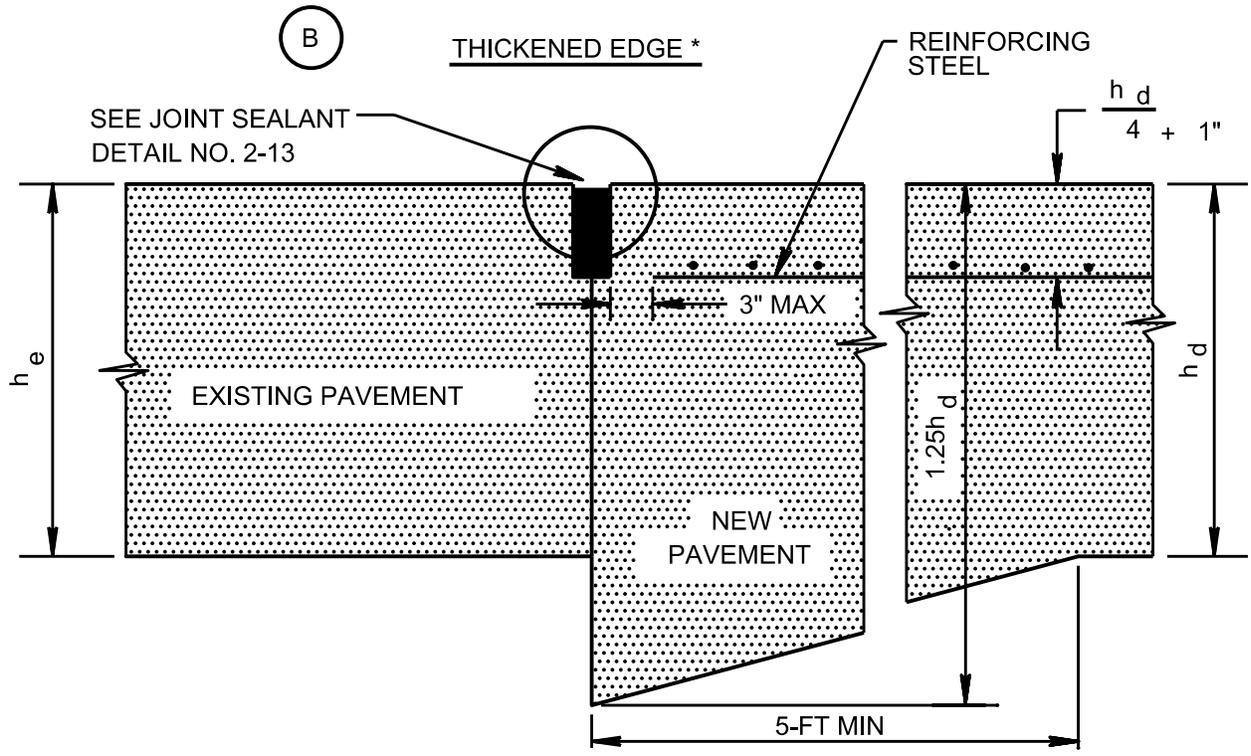

* NOTE : THIS TYPE JOINT SHOULD BE USED ONLY WHEN EXISTING PAVEMENT IS TO BE REPLACED IN A SHORT PERIOD OF TIME, SINCE WITHOUT LOAD TRANSFER IT WILL DETERIORATE QUICKLY !

REFERENCE: TM 5-825-3/AFM 88-6, CHAPTER 3,
RIGID PAVEMENTS FOR AIRFIELDS

CONSTRUCTION JT (DOWELED & TE) BETWEEN NEW & EXISTING REINFORCED CONC PAV'TS	DATE AUG 1992	FIGURE 2-16b
---------------------------------------------------------------------------------	------------------	-----------------