


CRACKS WIDTH - 1/8 IN TO 3/8 IN

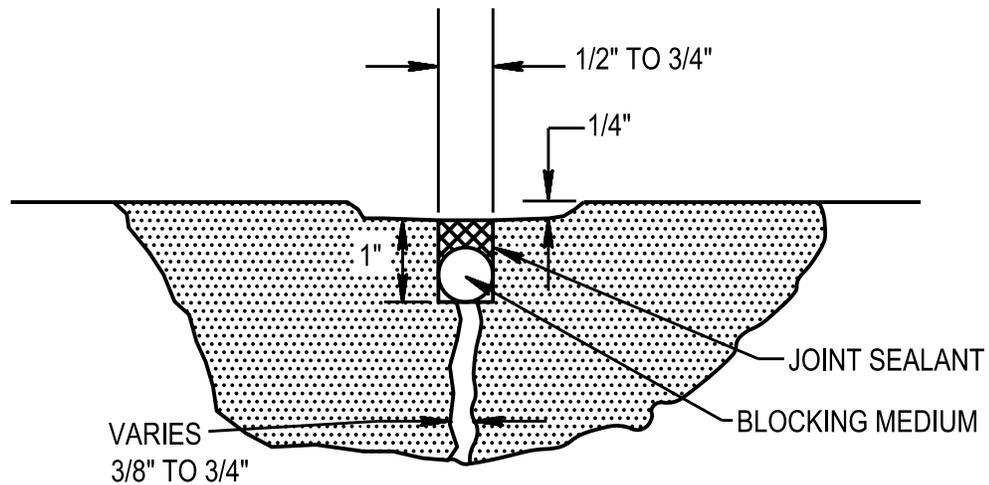

CRACKS WIDTH - 3/8 IN TO 3/4 IN

REFERENCE: CONTRACT REPAIR TO EXPAND MAINTENANCE FACILITY,  
FORT BENNING, GEORGIA

ROLLER COMPACTED CONCRETE  
PAVEMENT-CRACK SEALING

DATE  
AUG 1992

FIGURE  
2-20b