


KEYED LONGITUDINAL

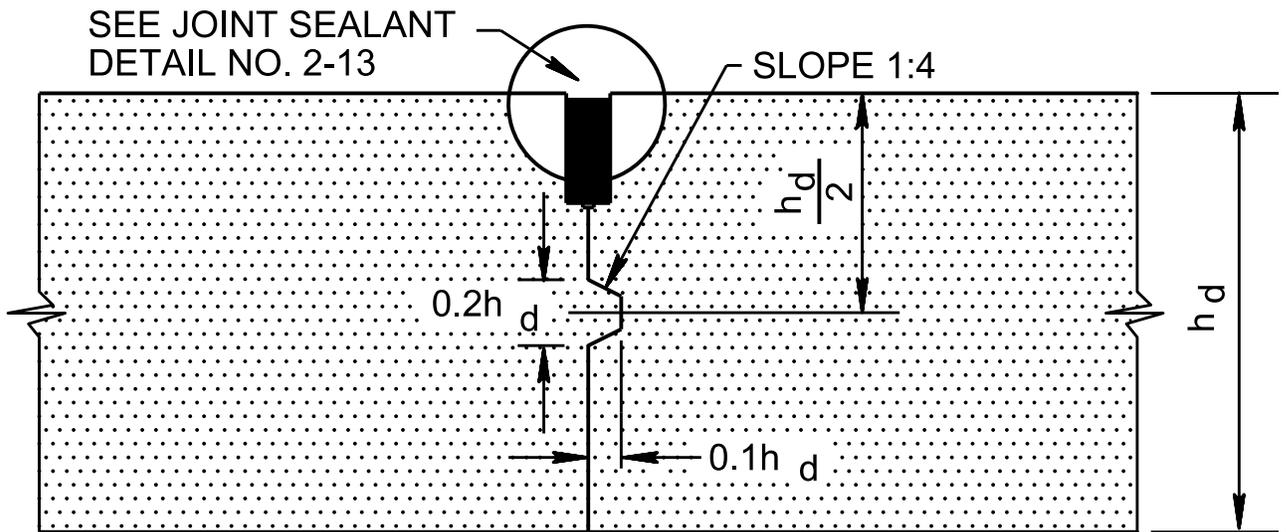

A TOLERANCE OF $\pm \frac{1}{16}$ " MAY BE ALLOWED
FOR KEY DIMENSIONS AND LOCATION

NOTE: TO BE USED ONLY WHEN SLAB THICKNESS
IS 9-INCHES OR MORE.

REFERENCE: TM 5-825-3/AFM 88-6, CHAPTER 3,
RIGID PAVEMENTS FOR AIRFIELDS

CONSTRUCTION JT (KEYED LONGITUDINAL)
FOR PLAIN CONCRETE PAVEMENTS

DATE
AUG 1992

FIGURE
2-6b