


KEYED CONSTRUCTION JOINT WITH TIE BARS OR
CONTRACTION JOINT WITH TIE BARS (A KEYED
JOINT WILL NOT BE USED WHEN h_d IS LESS
THAN 9-INCHES)

CROSS - SECTION

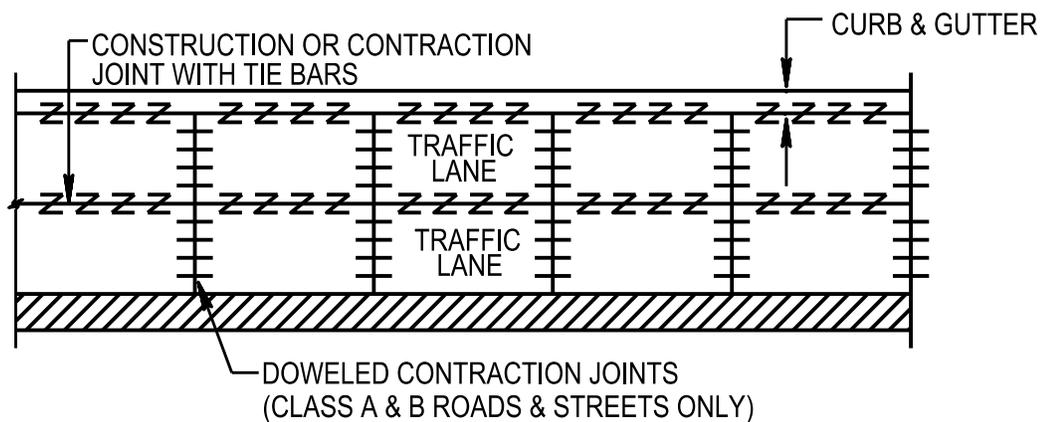

PLAN - VIEW

- DOWEL: SEE TABLE IN NOTE SECTION FOR
DOWEL SIZE AND SPACING
- Z TIE BARS: NO. 5 DEFORMED STEEL BARS
30" IN LENGTH, AND SPACED ON
30" CENTERS

REFERENCE: TM 5-822-6/AFM 88-7, CHAPTER 1, RIGID PAVEMENT
FOR ROADS, STREETS, WALKS AND OPEN STORAGE AREAS

PLAIN CONCRETE PAVEMENTS FOR
TWO LANE ROADS AND STREETS

DATE
AUG 1992

FIGURE
2-30a