

NOTES






ALL COMPONENTS DETAIL HEREON ARE TO BE GALVANIZED IN ACCORDANCE WITH SPECIFICATIONS.

THE COST OF FURNISHING AND PLACING ANCHOR UNITS AND PITCH PLATES FOR EACH INSTALLATION IS TO BE INCLUDED IN THE PRICE BID FOR "GUARD RAIL TERMINAL, COMPLETE."

ANCHOR BRACKET TO BE ROTATED TO THE ANGLE INDICATED AND SECURED IN POSITION BY THE PITCH PLATE.

ALL PLATE MATERIAL USED FOR FABRICATION OF THIS UNIT SHALL BE IN ACCORDANCE WITH ASSHTO M-183. REMOVAL OF ALL BURRS AND SHARP EDGES SHALL BE COMPLETE BEFORE FABRICATED UNIT IS HOT DIP GALVANIZED.

ALTERNATE STEEL POSTS DETAILED ON FIGURE 2-30g MAY BE SUBSTITUTED FOR DESIGNS SHOWN HEREON.

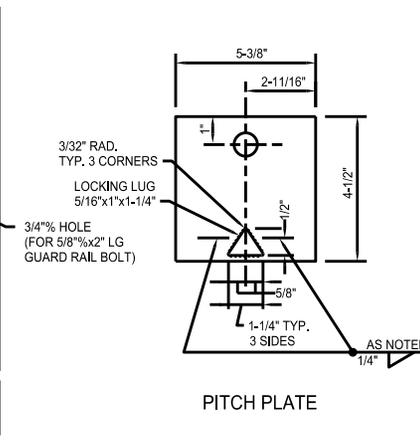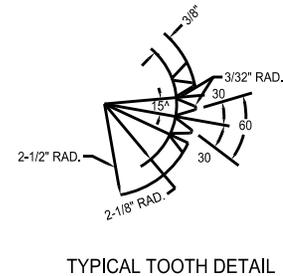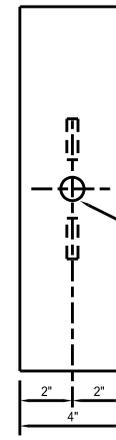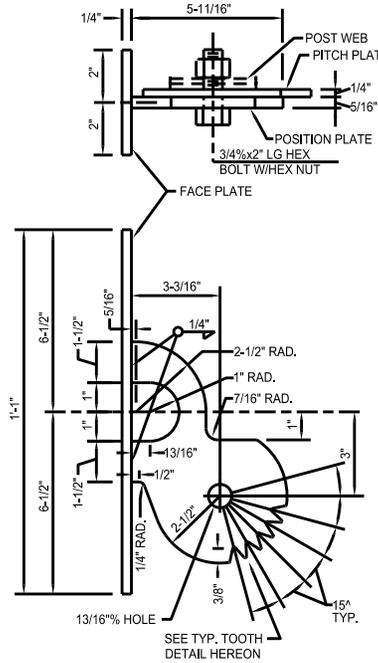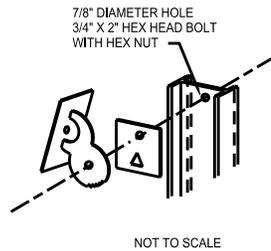

REFERENCE: FOR MORE INFORMATION ON GUARD RAILS SEE AASHTO "GUIDE FOR SELECTING, LOCATING AND DESIGNING TRAFFIC BARRIERS"

TYPICAL ALTERNATE ANCHORAGE FOR WITH BEAM
GUARD RAIL TERMINAL TREATMENT

DATE

FIGURE
2-30k