


## KEYED AND TIED LONGITUDINAL

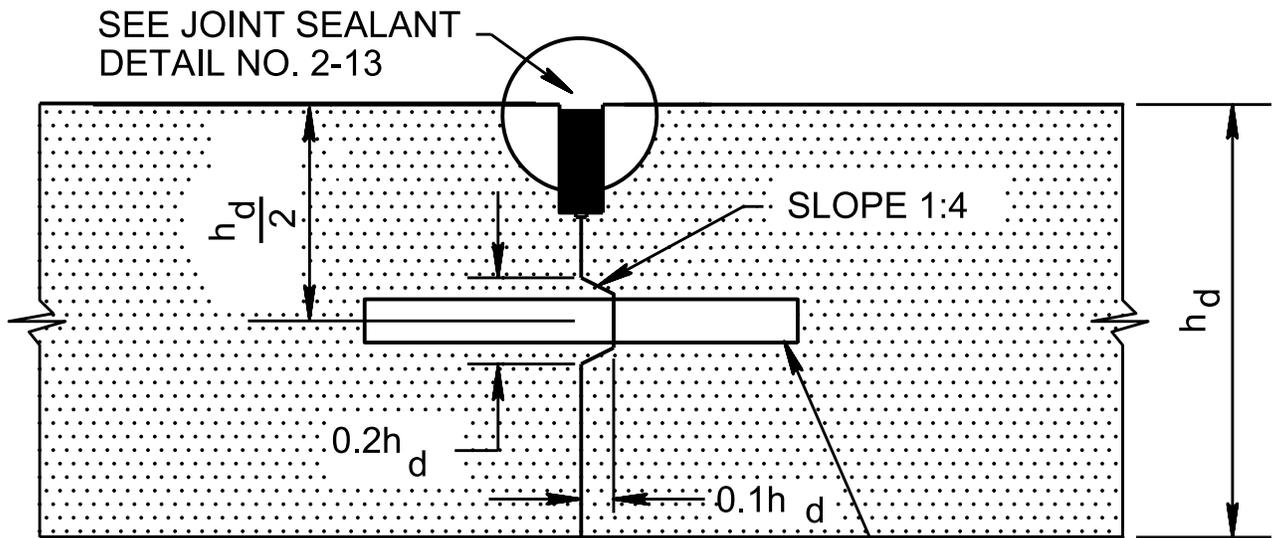

NO. 5 DEFORMED STEEL TIE BARS 2'- 6" LONG  
AND SPACED 2'- 6" ON CENTERS

NOTE: TO BE USED ONLY WHEN SLAB THICKNESS  
IS 9-INCHES OR MORE.  
A TOLERANCE OF  $\pm 1/16"$  MAY BE ALLOWED  
FOR KEY DIMENSIONS AND LOCATION  
  
TIED JOINTS IN PAVEMENT WIDTH  $> 75$  FEET  
IS NOT RECOMMENDED.

REFERENCE: TM 5-825-3/AFM 88-6, CHAPTER 3,  
RIGID PAVEMENTS FOR AIRFIELDS

CONSTRUCTION JT (KEYED & TIED LONGITUDINAL)  
FOR PLAIN CONCRETE PAVEMENTS

DATE  
AUG 1992

FIGURE  
2-6c