


CRACK REPAIR

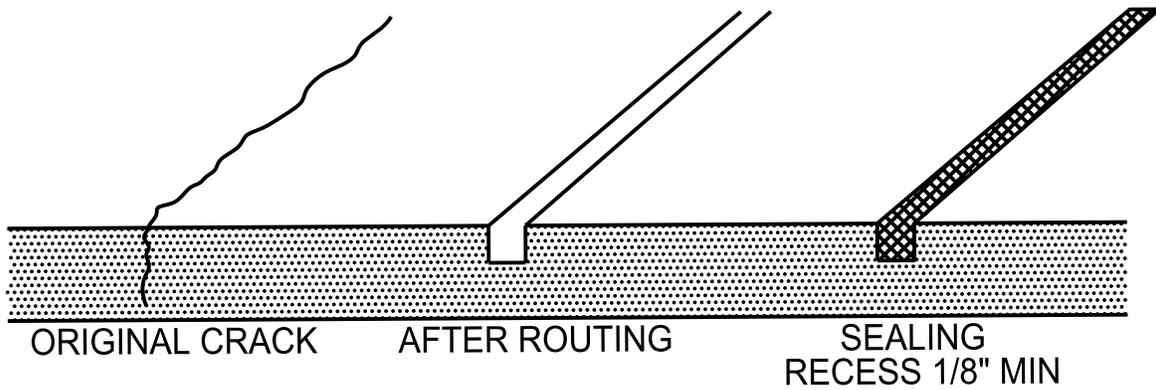

THE VARIABLE WIDTH AND AMOUNT OF SPALLING FOUND IN CRACKS NECESSITATES DIFFERENT PROCEDURES FOR REPAIR. SEE FIGURES 2-33a AND 2-33b

REFERENCE: TM5-822-9/AFM 88-6, CHAPTER 10,
REPAIR OF RIGID PAVEMENTS USING
EPOXY RESIN GROUTS, MORTARS AND
CONCRETE

REPAIR OF CONCRETE PAVEMENTS (CRACK)

DATE
AUG 1992

FIGURE
2-33f